



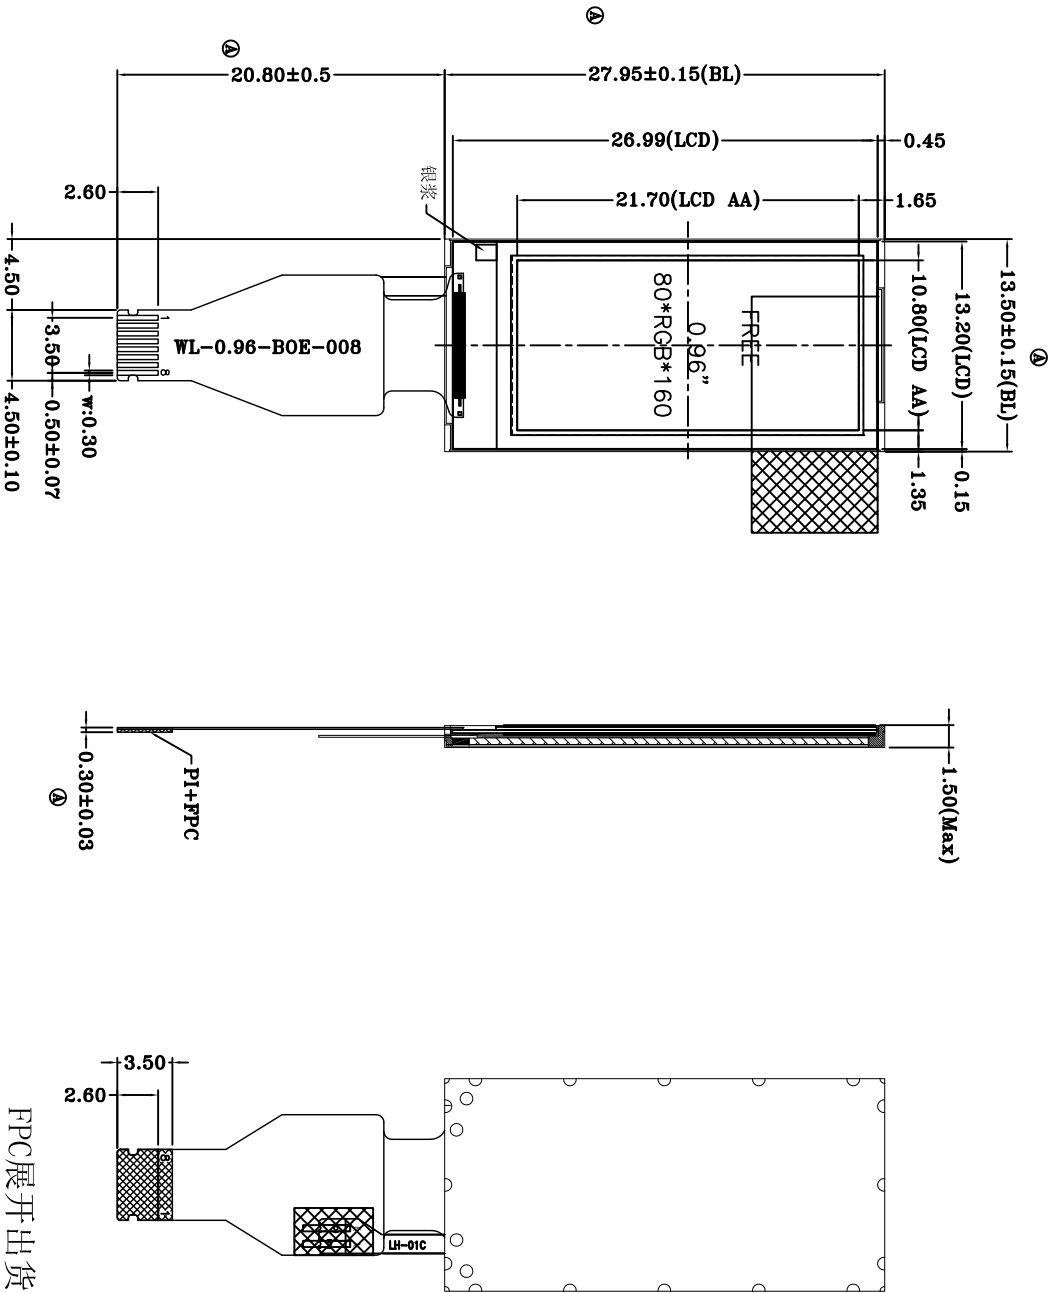

NO	SYMBOL
1	LEDA
2	GND
3	RESET
4	RS
5	SDA
6	SCL
7	VDD
8	CS



LCD SIZE/TYPE	0.96 inch	OPERATING TEMP.	-20°C TO +70°C	3rd Angle	UNIT:mm	SCALE:FTT	FANGSHENG ELECTRONIC LTD	
VIEWING DIRECTION	IPS/TRANSMISSIVE	STORAGE TEMP.	-30°C TO +80°C	UNMARKED	REV : 1.0	PAGE:1/1		
DRIVER IC	ST7735S	BACKLIGHT	WHITE Edge LED(X1),Vf:3.0V,If:20ma	TOLERANCE:±0.3	NAME	DATE	PART NAME	
POLARIZE TYPE	上细砂下增亮光	LUMINANCE	TBDcd/m2	DRAWN BY			MODEL NO.	FS-TE1096EN01
OPERATING VOLTAGE	VCC:2.8V~3.3V	Environmental Protection	RoHS Compliant	CHECKED BY			CUSTOMER NO.	/
MARK "Q" ARE IMPORTANT DIMENSION,MARK "()" ARE REFERENCE DIMENSION,MARK "S" ARE SPECIAL CHARACTERISTICS RELATED TO SAFETY, MARK "B" ARE SPECIAL CHARACTERISTICS RELATED TO REGULATORY MARK "Q" ARE KEY FEATURES CHARACTERISTICS.								
12Autodesk 教育版产品制作								